






UpadIV

Create Value, Continuously


-  Light Weight
-  Creative Display
-  High Precision Lock
-  Low Loss

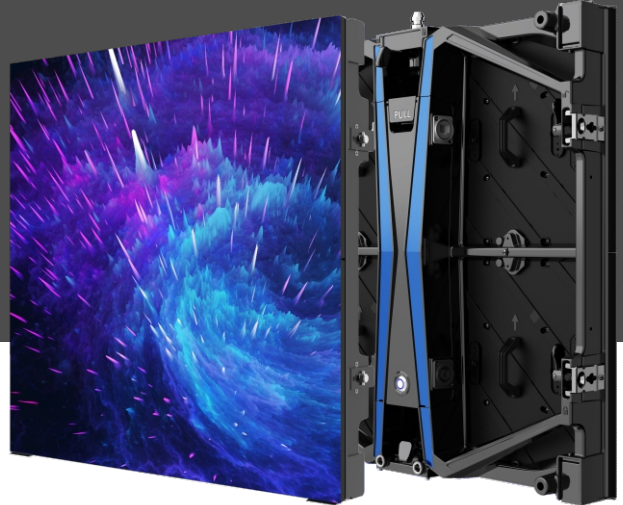

FEATURES

- Ultra lightweight – die-cast magnesium design, 30% lighter than other panels
- Automatic hanging lock – one-person installation and disassembly
- Flexible curve lock – high precision arc block
- Creative display – "S" shape, cylinder, rounded corner, cube and square corner

APPLICATIONS

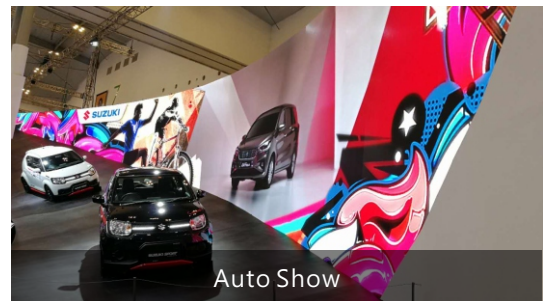

SPECIFICATIONS

Parameter	Value	
	UpadIV1.9	UpadIV2
Model	UpadIV1.9	UpadIV2
Pixel Pitch	1.9mm	2.6mm
Environment	Indoor	Indoor
LED Type	3-in-1 Black SMD	3-in-1 Black SMD
Brightness	800 cd/m ²	1,200 cd/m ²
Pixel Density	262,144 pixels/m ²	147,456 pixels/m ²
Panel Size (W×H×D)	500 × 500 × 70.1mm	500 × 500 × 70.1mm
Panel Resolution	256 × 256	192 × 192
Panel Weight	6.3 kg	6.3 kg
Material	Die-cast Magnesium	Die-cast Magnesium
Ingress Protection	IP30	IP30
Operating Temperature/Humidity	-10°C ~ 45°C/10% ~ 80% RH	-10°C ~ 45°C/10% ~ 80% RH
Maintenance	Front & Rear	Front & Rear
Curve (Convex - Concave)	-5° ~ 10°(Optional)	-5° ~ 10°(Optional)
Viewing Angle (H/V)	160°/160°	160°/160°
Contrast Ratio	5,000:1	6,000:1
Input Power/Panel (Max./Ave.)	120/40 W	150/50 W
Refresh Rate	7680 Hz	7680 Hz
Input Voltage	100 ~ 240 VAC	100 ~ 240 VAC
Input Power Frequency	50 ~ 60 Hz	50 ~ 60 Hz
Standard Mounting Configuration	Hanging, Stacking	Hanging, Stacking
Certification	CE/CB/IC/FCC/UL/EAC/PSE	CE/CB/IC/FCC/UL/UKCA/EAC

Note: Specifications are for reference only and are subject to change without notice.

DIMENSIONS

