


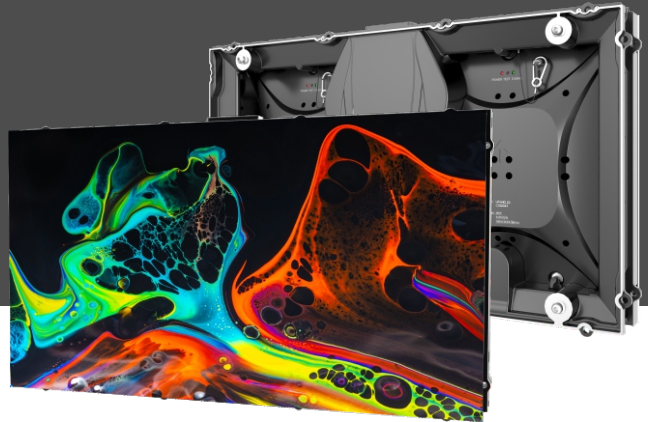


Upanels

Intelligent Front Access 16:9 LED Display Unit


-  Front Maintenance
-  HDR Highly Dynamic
-  Seamless Splicing



FEATURES

- Intelligent front maintenance – software maintenance and smart bracelet induction maintenance
- HDR highly dynamic display – stunning visual experience(Optional)
- Revolutionary separate structure of cabinet and module – good heat dissipation
- Seamless splicing between cabinets and modules
- High gray scale under low brightness

APPLICATIONS

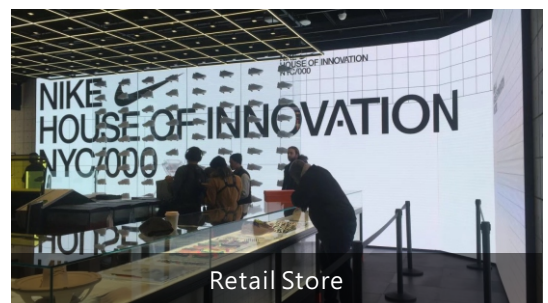

SPECIFICATIONS

Parameter	Value				
Model	Upanel0.9S	Upanel1.2S	Upanel1.5S	Upanel1.9S	Upanel2.5S
Pixel Pitch	0.95mm	1.27mm	1.58mm	1.906mm	2.54mm
Pixel Density	1,101,068 dots/m ²	620,001 dots/m ²	396,550 dots/m ²	275,267 dots/m ²	155,000 dots/m ²
Panel Size (W×H×D)	609.92mm× 343.08mm × 71mm	609.92mm× 343.08mm × 71mm	609.92mm× 343.08mm × 71mm	609.92mm× 343.08mm × 71mm	609.92mm× 343.08mm × 71mm
Panel Resolution	640 × 360 dots	480 × 270 dots	384 × 216 dots	320 × 180 dots	240 × 135 dots
Material	Die-cast Magnesium Aluminum	Die-cast Magnesium Aluminum	Die-cast Magnesium Aluminum	Die-cast Magnesium Aluminum	Die-cast Magnesium Aluminum
Brightness	600-800 cd/m ²	600-800 cd/m ²	600-800 cd/m ²	600-800 cd/m ²	600-800 cd/m ²
Color Temperature	2,000 - 9,500 K Adjustable	2,000 - 9,500 K Adjustable	2,000 - 9,500 K Adjustable	2,000 - 9,500 K Adjustable	2,000 - 9,500 K Adjustable
Viewing Angle (H/V)	160°/160°	160°/160°	160°/160°	160°/160°	160°/160°
Panel Weight	6.8 kg	6.8 kg	6.8 kg	6.8 kg	6.8 kg
Aspect Ratio (W:H)	16:9	16:9	16:9	16:9	16:9
Service Access	Front	Front	Front	Front	Front
Input Power/Panel (Max.)	150-160 W	140-150 W	140 W	117-140 W	80-90 W
Input Power/Panel (Ave.)	50-54 W	46-50 W	46-47 W	42-47 W	26-30 W
Ingress Protection	IP50	IP50	IP50	IP50	IP50
Input Voltage	100 - 240 VAC	100 - 240 VAC	100 - 240 VAC	100 - 240 VAC	100 - 240 VAC
Refresh Rate	1,920 - 3,840 Hz	1,920 - 3,840 Hz	1,920 - 3,840 Hz	1,920 - 3,840 Hz	1,920 - 3,840 Hz
Operating Temperature/Humidity	-10°C to 45°C /10% - 80% RH	-10°C to 45°C /10% - 80% RH	-10°C to 45°C /10% - 80% RH	-10°C to 45°C /10% - 80% RH	-10°C to 45°C /10% - 80% RH
Storage Temperature/Humidity	-20°C to 55°C /10% - 85% RH	-20°C to 55°C /10% - 85% RH	-20°C to 55°C /10% - 85% RH	-20°C to 55°C /10% - 85% RH	-20°C to 55°C /10% - 85% RH

DIMENSIONS

