

T —SERIES—



No Steel



High Gray Scale



High Protection Class




All Weather




Front/Rear Maintenance




Energy saving

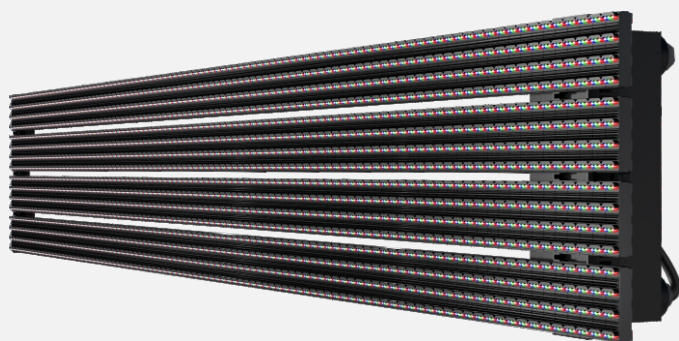

APPLICATIONS

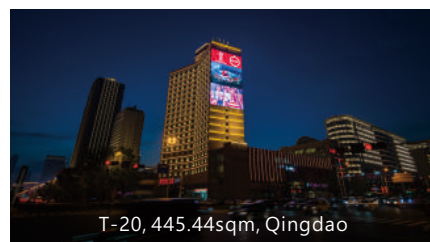

T-20, 445.44sqm, Qingdao

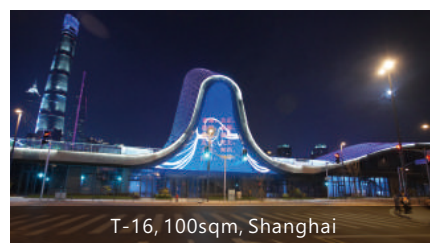

T-16, 100sqm, Shanghai



T-13, 160sqm, Shenzhen

FEATURES

- No steel structure, adapt to various types of buildings
- Front/rear installation and maintenance
- Easy to create all kinds of customized shapes
- Save energy and reduce operating costs



SPECIFICATIONS

Parameter	Value		
	T-13C	T-16C	T-H16C
Model	T-13C	T-16C	T-H16C
Pixel Pitch	12.8 mm/13.71 mm	16 mm/16 mm	16 mm/16 mm
Pixel Density	5,700 dots/m ²	3,096 dots/m ²	3,096 dots/m ²
Brightness	≥10,000 cd/m ²	6,000 - 6,500 cd/m ²	12,000 cd/m ²
Unit Size (Customizable)	1,536×256mm (Horizontal) 256×1,536mm (Vertical)	1,536×256mm (Horizontal) 256×1,536mm (Vertical)	1,536×256mm (Horizontal) 256×1,536mm (Vertical)
Unit Resolution	112×20 dot (Horizontal) 20×112 dot (Vertical)	96×16 dot (Horizontal) 16×96 dot (Vertical)	96×16 dot (Horizontal) 16×96 dot (Vertical)
Material	Aluminum body, PC Mask	Aluminum body, PC Mask	Aluminum body, PC Mask
Transparency	6%	15%	15%
Weight	24.6 kg/m ²	20.8 kg/m ²	20.8 kg/m ²
Installation	Front & Rear	Front & Rear	Front & Rear
Power Consumption (Max.)	510 W/m ²	380 W/m ²	350 W/m ²
Power Consumption (Ave.)	170 W/m ²	126 W/m ²	116 W/m ²
Ingress Protection	IP67	IP67	IP67
Input Voltage	100 - 240 VAC	100 - 240 VAC	100 - 240 VAC
Refresh Rate	≥1,920 Hz	≥1,920 Hz	≥1,920 Hz
Operating Temperature/Humidity	-30°C to 60°C/10% - 90% RH	-30°C to 60°C/10% - 90% RH	-30°C to 60°C/10% - 90% RH

DIMENSIONS

