










UDF

Professional Floor LED Displays


-  Dual backup and supply function
-  High grayscale & High refresh
-  Internal and external waterproofing
-  Super load-bearing
-  Unique surface-lighting technology
-  Easier maintenance
-  Effective heat dissipation
-  Excellent noise reduction
-  Multiple protection design



FEATURES

- A variety of core technologies to achieve stable performance
- Excellent image quality with smooth and visual performance
- Layers of protection for effective noise reduction and less vibration
- Independent modular design for easier maintenance

APPLICATIONS

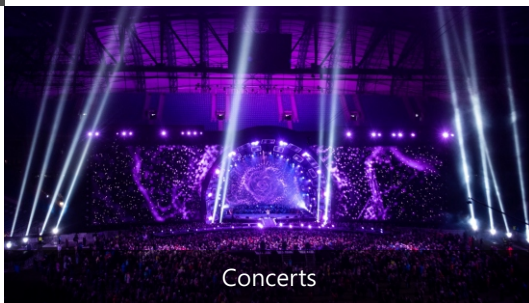

SPECIFICATIONS

Parameter	Value
Model	UDF05
Pixel Pitch	5.2
Environment	Outdoor
LED Type	3-in-1 SMD
Brightness	1500 cd/m ²
Pixel Density	36,864 Pixel/m ²
Model Size(W x H)	250mm x 250mm
Panel Size(W x H x D)	500mm x 500mm x 105mm
Panel Resolution	96x96 dots
Panel Weight	11.2 kg
Material	Aluminum Alloy
Haze ratio	97%
transmittance	50%
Impact protection grade	Ik10
Static friction coefficient (dry state)	0.98
Ingress Protection	IP 65
Operating Temperature/Humidity	-20~+45°C/ 10~90% RH
Maintenance	Front (whole cabinet)
Viewing Angle(H/V)	170°/170°
Input Power/Panel(Max.)	85W
Input Power/Panel(Ave.)	30W
Refresh Rate	3840Hz
Input Voltage	100-240 VAC
Input Power Frequency	50-60Hz
Standard Mounting Configuration	Tiling

DIMENSIONS

