


ULW

ULW1.5 Ultra-thin Front Maintenance 16:9 LED Display Unit



Product features:

1. Golden ratio 16:9, point-to-point full HD display of standard resolution.
2. Thickness of 39.5mm, ultra-thin and ultra-light design.
3. Full front maintenance
4. Wireless connection between cabinet and modules

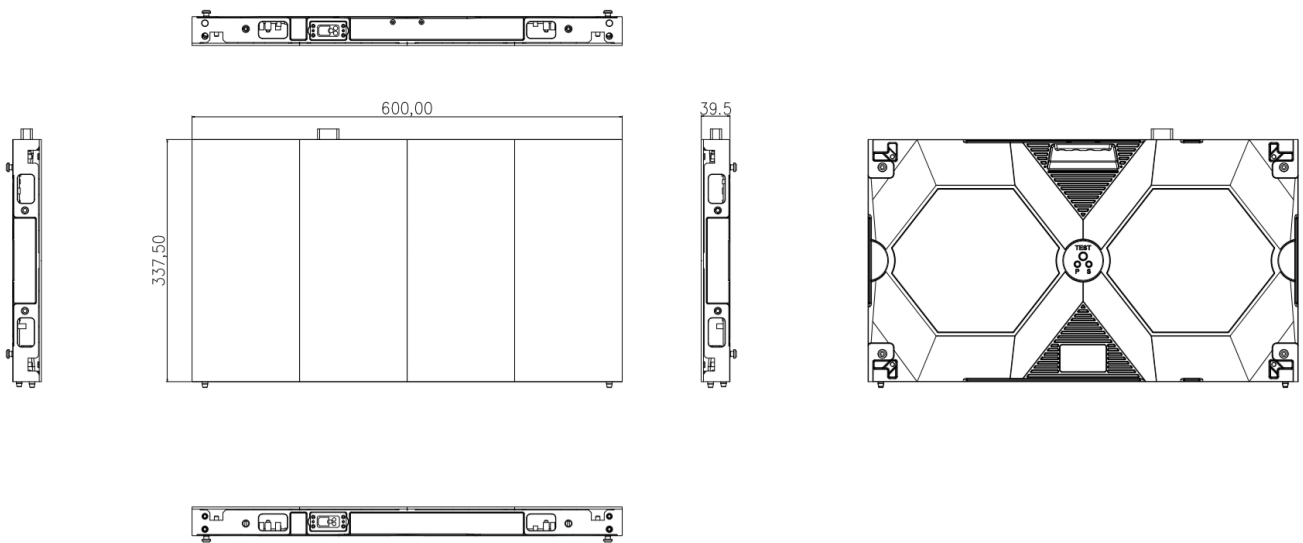

Main Technical Specifications:

Parameter	Value
Pixel Pitch	1.56
LED Type	3-in-1 SMD
Brightness	600cd/ m ²
Pixels Per Module	96x216pixels
Pixel Density	409600pixels /m ²
Pixels Per Panel	384x216pixels
Module Size	150mmx337.5mm
Panel Size	600mmx337.5mmx39.5mm
Weight	5.2kg/panel
Maintenance	Front
Ingress Protection	Rear IP50
Curve	0°~+5° (Concave)
Planeness	≤0.2mm
Material	Die-cast Aluminum
Calibration	Support brightness and chroma
Color Temperature	2,000K-10,000K Adjustable
Horizontal Viewing Angle	170°
Vertical Viewing Angle	170°
Contrast Ratio	7000: 1
Input Power <Max>	100W/panel
Input Power <Typical>	33W/panel
Input Voltage	AC: 100~240 V
Processing Depth	16bit
Refresh Rate	3840Hz
Video Frame Rate	50&60Hz
LED Life Time	100,000 Hours
Operating Temperature/Humidity	0°C~50°C/ 10~75% RH
Storage Temperature/Humidity	-40°C~60°C/ 10~90% RH
Certification	CE/CB/CCC

Note: Specifications are for reference only and are subject to change without notice.

Power consumption tolerance: ±15%, according to the actual situation.