

## UfixII6 Outdoor Waterproof Type Fixed LED Display Unit



Rear Maintenance



Energy Saving



High Protection



Wide Viewing Angle



High precision

### Cabinet Drawing

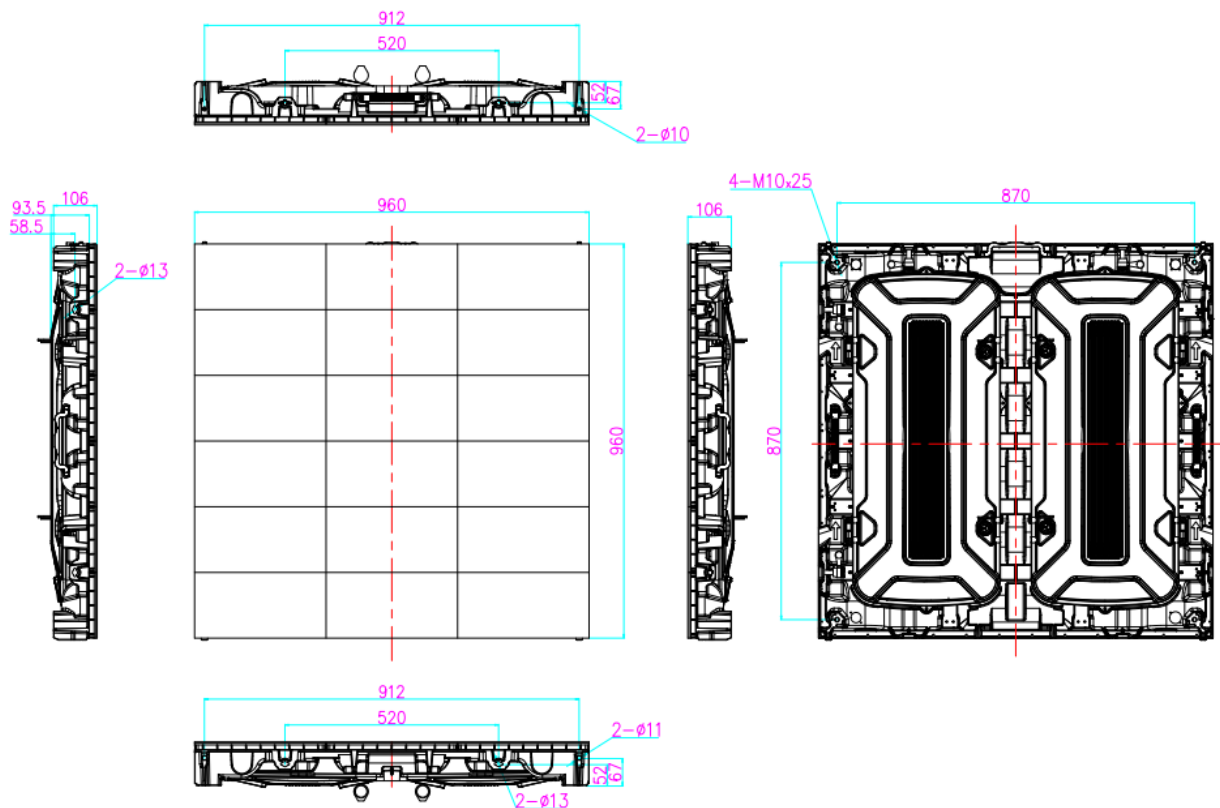


Figure 1 Drawing of Rear Maintenance Cabinet

## Main Technical Specifications

Parameter	Value
Pixel Pitch	6.67mm
LED Type	3-in-1 SMD
Brightness	6000~7500cd/m <sup>2</sup>
Pixel Density	22500 pixels/m <sup>2</sup>
Pixels Per Panel	144x144 Dots
Module Size	W320mmxH160mm
Panel Size	W960mmxH960mmxD111mm (Power box included)
Weight	32.8kg/m <sup>2</sup>
Maintenance	Rear
Ingress Protection	IP65(Front)/IP65(Rear) Customized
Aspect Ratio	1:1
Panel Area	0.9216 m <sup>2</sup>
Planeness	≤0.4mm
Recommended Viewing Distance	≥7m
Environment	Outdoor
Material	Die-casting aluminum
Calibration	Support brightness and chroma
Brightness Control	Manual/Automatic
Color Temperature	2000-9500K Adjustable
Horizontal Viewing Angle	140°
Vertical Viewing Angle	120°
Contrast Ratio	7000:1
Input Power <Max>	750~800W/ m <sup>2</sup>
Input Power <Typical>	250~267W/ m <sup>2</sup>
Input Voltage	200~240VAC
Processing Depth	14bit
Refresh Rate	3840 Hz
Video Frame Rate	50/60 Hz
Input Power Frequency	50~60 Hz
LED Life Time	100,000 Hours
Operating Temperature/Humidity	-20℃~+50℃(Optional - 40℃)/10~90%RH
Storage Temperature/Humidity	-30℃~+60℃(Optional - 40℃)/10~80%RH
Standard Mounting Configuration	Fixed

Note: Specifications are for reference only and are subject to change without notice.

Power consumption tolerance: ±15%, according to the actual situation.