

Ustorm III — SERIES —

Leading in 3H OOH Advertising Era



Smart Brightness



Energy Saving



High Protection




Easy Operation & Maintenance




Front / Rear Maintenance



APPLICATIONS

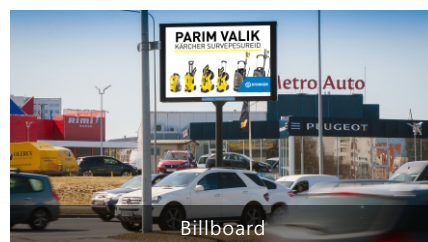


Billboard

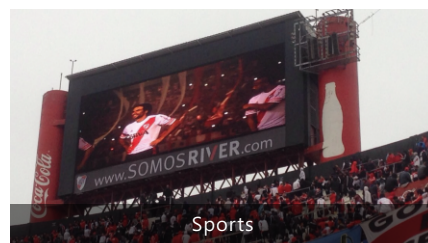

Sports



Gas Station

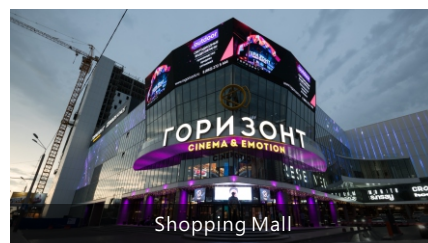

Shopping Mall

FEATURES


- High visibility with leading brightness 13,000nits
- High ROI, saving energy by 25%
- High protection, durable in all-weather
- Convenient design & Utility



SPECIFICATIONS

Parameter	Value
Model	UstormIII16
Pixel Pitch	16.67mm
Pixel Density	3,600 pixels/m ²
Panel Resolution	48×54 Dots
Panel Size (W × H × D)	800mm x 900mm x 96 mm
Material	Aluminum
Brightness	8,000 cd/m ² 10,000 cd/m ² 13,000 cd/m ²
Color Temperature	2,000 – 9,500K Adjustable
Viewing Angle (H/V)	120°/60° 100°/40°
Panel Weight	30.7kg/m ²
Contrast Ratio	9,000:1 12,000:1 15,000:1
Service Access	Front or Rear or Front & Rear
Input Power/Panel (Max.)	300W 280W 390W
Input Power/Panel (Ave.)	100W 94W 130W
Ingress Protection	IP65
Input Voltage	100 - 240 VAC
Refresh Rate	3,840 Hz
Operating Temperature/Humidity	-20°C to 50°C/10% - 90% RH
Storage Temperature/Humidity	-30°C~+60°C/10~80%RH

DIMENSIONS

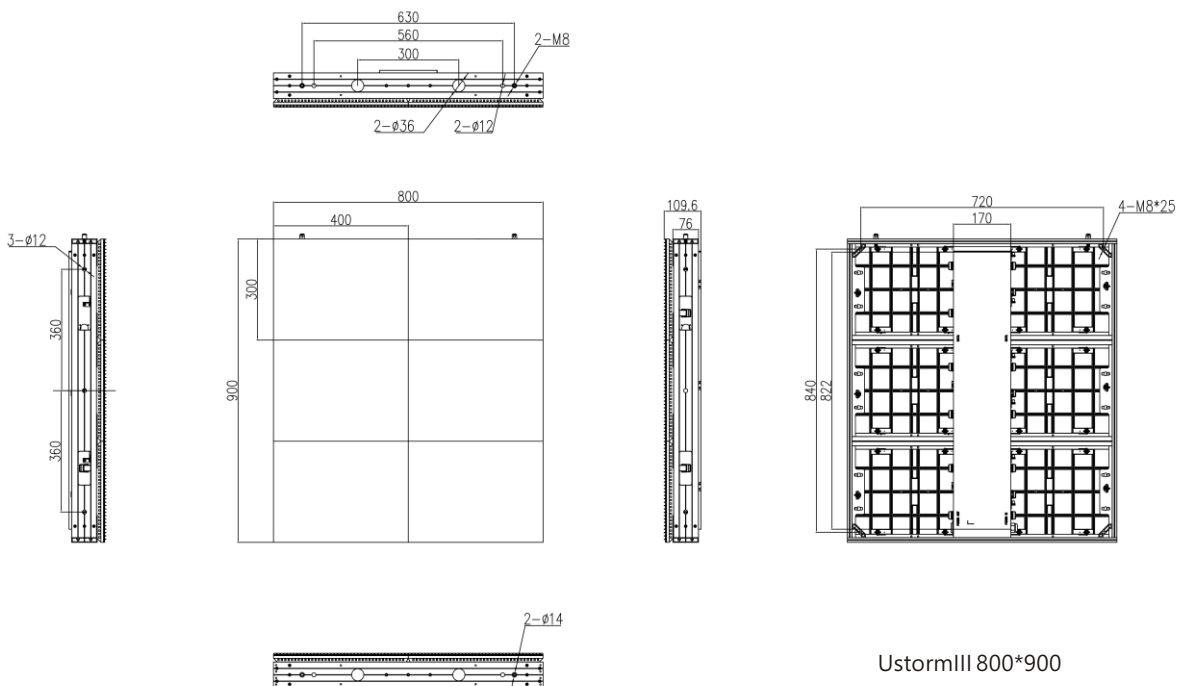

UstormIII 800*900

